


CLINCHING + STAPLING »»» IN A SINGLE PULL


TOOL FEATURES

1. Precision machined, durable anvil and nose for consistent driving
2. 360° adjustable exhaust.
3. Rear-jam clearance investment-casted protector minimizes downtime and maximizes tool durability.

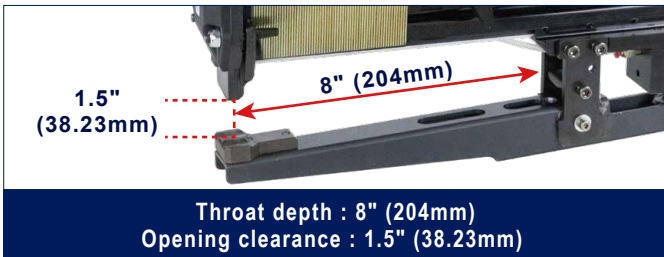

FASTENER SPECS

Type	SN402S2CL: Bostitch BCS2 SN402PCL: Senco P
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	SN402S2CL: 25.4mm (1") SN402PCL: 26.4mm (1.0625")
C	1.6 x 1.4mm (0.062" x 0.055")

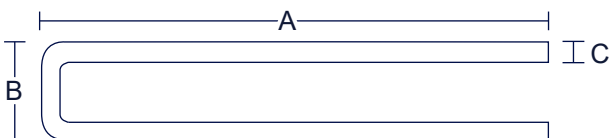

TOOL SPECS

Weight	3.45 kgs (7.6 lbs)
Height	310mm (12.2")
Width	85mm (3.4")
Length	363mm (14.3")
Operating Pressure	5.5~6.2 bar (80~90 psi)
Driving Power	345 In-lbs @100 psi
Applications	Corrugated Box Fabrication, Light Assembly, Packaging, Tagging, Displays

