

TOOL FEATURES

- 1. Rear Exhaust reduces noise and directs air away from user
- 2. Low Staple Lockout prevents dry fires
- 3. Pinch Free ergonomic trigger
- 4. Tool Free jam clearing
- Two trigger options available:
FSN38-ST (Sequential) / FSN38-CT (Contact)




Vinyl siding att available FSM38V

Variant Model#	Description
FSN38	Standard tool, no depth of driver adjustment.
FSN38D	Includes all metal, tool free depth adjustment, belt hook.
FSN38V	Vinyl siding tip, best for resistance and weatherproofing maintenance.



FASTENER SPECS

Type	16 & 17 GA. Bostitch S5 / SENCO N
Loading Capacity	120
A	12.7~38mm (1/2"~1-1/2")
B	10.6~11.1mm (7/16")
C	1.6 x 1.4mm (0.062" x 0.055")

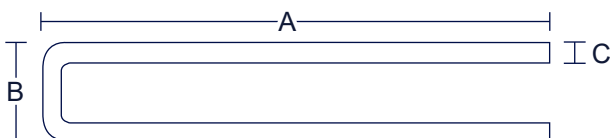

TOOL SPECS

Weight	1.48 kgs (3.26 lbs)
Height	236mm (9.3")
Width	60mm (2.4")
Length	317mm (12.5")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	185 In-lbs @100 psi
Applications	Trim Work, Furniture Building, Other Finish Applications

