


## TOOL FEATURES

1. Tool Free depth of drive adjustment
2. Fast, powerful industrial engine
3. Lightweight, durable magnesium frame
4. Rotating rafter hook
5. Swivel Fitting included
  - Two trigger options available :  
PN65M-DOD-ST (sequential) / PN65M-DOD-CT (contact)



## FASTENER SPECS

Type	15° Wire Collated Nails
Loading Capacity	225~300
A	38~65mm (1-1/2"~2-1/2")
B	5.7~7.2mm (0.224"~0.283")
C	2.5~3.1mm (0.099"~0.120")

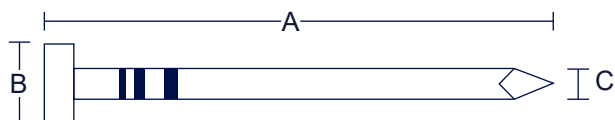

## TOOL SPECS

Weight	2.8 kgs (6.2 lbs)
Height	311mm (12.2")
Width	128mm (5")
Length	300mm (11.8")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	680 In-lbs @100 psi
Applications	Decking, Sheathing, Subflooring, Siding

