

TOOL FEATURES


1. 360° adjustable exhaust.
2. Depth adjust device / front protection plate.
3. Drop test-proven aluminum magazine.
4. Magnesium ergonomic frame / over-molded handle grip.
5. Magnesium casted one-piece bracket .
6. Rear-jam clearance investment-casted protector maximizes tool durability and minimizes downtime .

- High speed operation, 15 cycles/second.
- Various trigger option available.
- RCVA1 Negative Pressure / Straight
- RCVA2 Negative Pressure / 90°
- RCVA3 Positive Pressure / 90°
- TVA2 Electric Valve
- SEQ Sequential fire
- CT Bump fire
- Auto Automatic fire valve
- Trigger Block.



FASTENER SPECS

Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	360
A	25~50mm (1"~2")
B	25.4mm (1")
C	1.6 x 1.4mm (0.062" x 0.055")

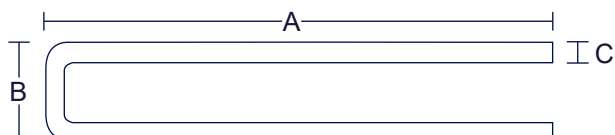

TOOL SPECS

Weight	2.7 kgs (5.9 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	570mm (22.4")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	369 In-lbs @100 psi
Applications	Furniture Framing, Machine Automation

