


TOOL FEATURES

1. Steel exhaust cover.
 2. Tool-free depth adjust.
 3. Robust nylon magazine with industry leading durability.
 4. Robust rafter hook engineered composite material.
 5. Magnesium ergonomic frame provides mobility and balance during operation.
- Industry leading power-weight ratio.
 - Rapid cycling valve, 15 cycles/second.
 - Two trigger options available :
SCN90L-ST (sequential) / SCN90L-CT (contact)



FASTENER SPECS

Type	15° Wire & Plastic Collated Nails
Loading Capacity	150~300
A	50~90mm (2"~3-1/2")
B	6.5~7.7mm (0.256"~0.303")
C	Wire : 2.5~3.8mm(0.099"~0.148") Plastic : 2.5~2.9mm(0.099"~0.113")

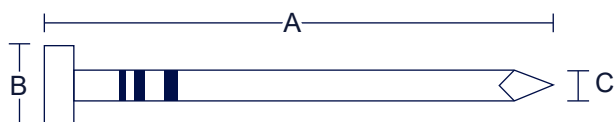

TOOL SPECS

Weight	3.0 kgs (6.6 lbs)
Height	364mm (14.3")
Width	130mm (5.1")
Length	311mm (12.2")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	1000 In-lbs @100 psi
Applications	Framing, Sheathing , General Construction

