


TOOL FEATURES

1. One-piece aluminum cap.
2. Durable hardened claw tip.
3. Ergonomic frame provides mobility and balance.
4. Flexible aluminum magazine minimizes deformation from drop impact.
 - Quick response and rapid, powerful driving engine.
 - Tool-free depth adjust available : **FSN2283AD**
 - Two trigger options available :
FSN2283A-ST (sequential) / FSN2283A-CT (contact)



FASTENER SPECS

Type	21° Plastic Collated Nails
Loading Capacity	70
A	50~90mm (2"~3-1/2")
B	6.8~8.0mm (0.268"~0.315")
C	2.9~3.8mm (0.113"~0.148")

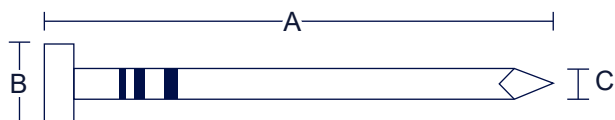

TOOL SPECS

Weight	3.7 kgs (8.2 lbs)
Height	340mm (13.4")
Width	120mm (4.7")
Length	523mm (20.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	823 In-lbs @100 psi
Applications	Sheathing, Framing, General Construction

