


**TOOL FEATURES**

1. Geared with high flow driver guide.
2. Anti-abrasive driver.
3. Remote control valve assembly.
  - High speed operation, 15 shots/second.
  - Geared with remote control trigger valve.
  - Geared with high flow driver guide.
  - Fitted with 3/8" NPT for 3/8" air plug.
  - 2 versions of valves available

**RCVA1**  
Straight Fitting Type




**RCVA2**  
Elbow Fitting Type

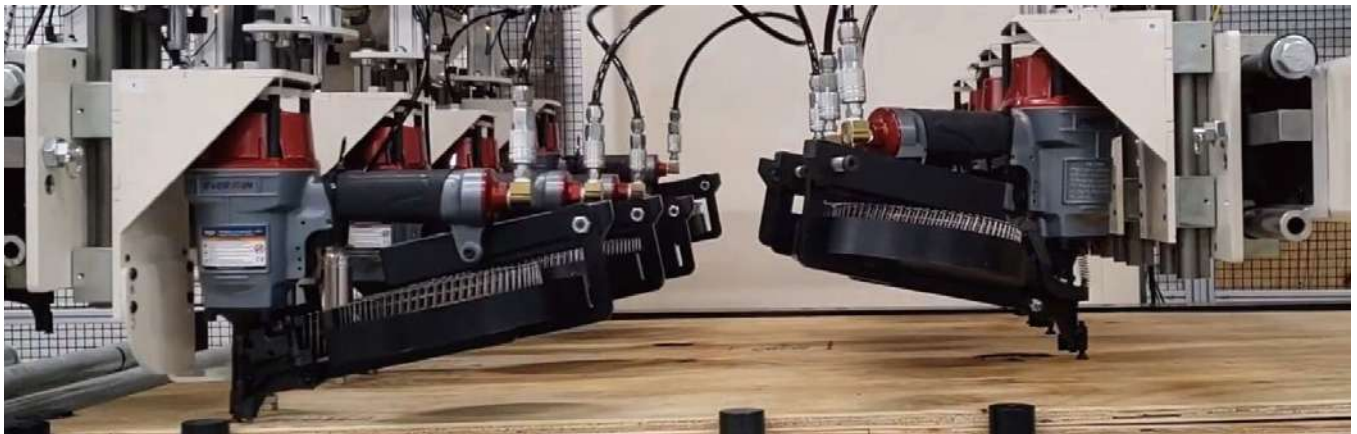

**FASTENER SPECS**

Type	15° Wire Collated Nails
Loading Capacity	2000~3000
A	45~70mm (1-3/4"~2-3/4")
B	5.7~7.2mm (0.224"~0.283")
C	2.3~2.9mm (0.092"~0.113")



**TOOL SPECS**

Weight	2.9 kgs (6.4 lbs)
Height	315mm (12.5")
Width	112mm (4.4")
Length	306mm (12")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	712 In-lbs @100 psi
Applications	Machine-mounted Automatic Operation

