


TOOL FEATURES

1. Robust gravity casted frame for extended tool life.
2. Powerful shuttle blade for pre-compression prior to and during operation.
3. Special-treated clinch plate for maximum durability.
4. 6" x 1" high throat provides flexibility during usage.
5. Standard equipped air-flow adjust port.
 - High speed operation .
 - Durable for professional use.
 - Curved anvils available for various applications.
 - CR / CL / DR / DL / B type anvils available.

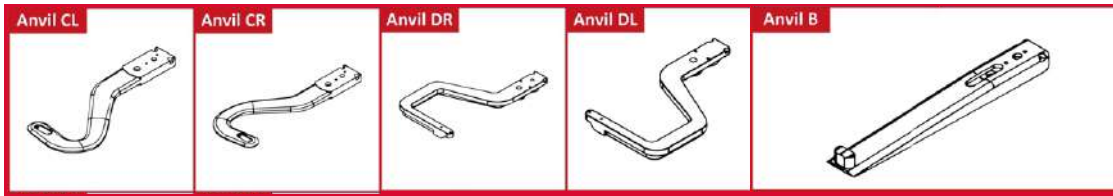

TOOL SPECS

Weight	2.2 kgs (4.8 lbs)
Height	240mm (9.4")
Width	55mm (2.2")
Length	370mm (14.6")
Operating Pressure	2.5~3.9 bar (36~55 psi)
Applications	Corrugated Containers, Pallet Boxes, container Inserts



FASTENER SPECS

Model Number	Staple Type	Loading Capacity	A	B	C
PS50-10B	Bostitch SB103020	100	10~16mm (3/8"~5/8")	12.95mm (1/2")	0.50 x 2.60mm (0.020" x 0.103")
PS50-5B	Bostitch SB5019	220	10~16mm (3/8"~5/8")	12.85mm (1/2")	0.55 x 1.27mm (0.022" x 0.050")
PS50-777	KIHLBERG JK777	140	10~16mm (3/8"~5/8")	12.3mm (1/2")	0.65 x 2.25mm (0.026" x 0.090")
PS50-779	KIHLBERG JK779	250	10~16mm (3/8"~5/8")	12.3mm (1/2")	0.50 x 2.60mm (0.020" x 0.103")
PS50-80	80 Series	250	10~16mm (3/8"~5/8")	12.8mm (1/2")	0.50 x 1.25mm (0.020" x 0.049")

