


**TOOL FEATURES**

1. Powerful engine penetrates up to 2 layers of triple wall corrugated board.
2. Bolted depth adjustment sets staples to desired driving depth.
3. Fixed hardened anvil provides tool longevity & clinch consistency.
4. Rear exhaust.
5. Ergonomic frame rubber handle grip.
  - 2.6" clinch throat depth.
  - Fixed anvil allows rapid sideways movement.
  - Anvil height adjustable with spacer plates for different corrugate thicknesses.



**FASTENER SPECS**

Type	KIHLBERG 590 / Omer 590
Loading Capacity	100
A	16~32mm (5/8"~1-1/4")
B	24mm (15/16")
C	0.9 x 1.9mm (0.035" x 0.075")

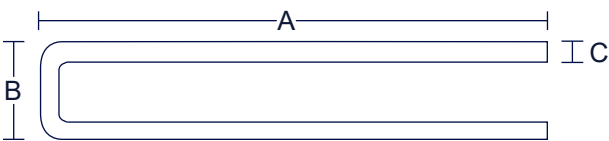

**TOOL SPECS**

Weight	2.5 kgs (5.5 lbs)
Height	224mm (8.8")
Width	67mm (2.6")
Length	340mm (13.4")
Operating Pressure	5~6.9 bar (70~100 psi)
Applications	Edge protection, Trays & lids, Sealing end caps, container inserts, double or triple wall corrugate

