


## TOOL FEATURES

1. Adjustable exhaust ensures workplace comfort.
2. Trigger mode switch with trigger safety lock conveniently switches between rapid and sequential firing mode.
3. Tool-free depth adjust.
4. No-mar pad included.
5. Robust nylon magazine industry leading durability.
6. Cushioned rubber grip ergonomic frame provides comfort and balance.
  - High speed operation, 15 shots/second.
  - Industry's highest pitch and collation type compatibility.
  - 420 In-lbs of driving force.
  - Two trigger options available :  
SCN51-ST (sequential) / SCN51-CT (contact)



## FASTENER SPECS

Type	15° Wire & Plastic Collated Nails
Loading Capacity	200~400
A	Wire : 32~50mm (1-1/4"~2") Plastic : 25~50mm (1"~2")
B	4.2~5.3mm (0.165"~0.209")
C	2.1~2.3mm (0.083"~0.090")

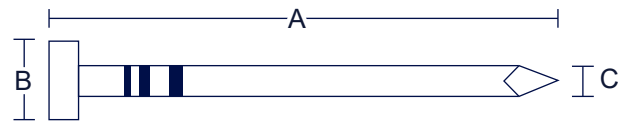

## TOOL SPECS

Weight	2.0 kgs (4.4 lbs)
Height	271mm (10.6")
Width	126mm (4.9")
Length	246mm (9.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	420 In-lbs @100 psi
Applications	Siding, Fencing, Sheathing and Light Crating

