


**TOOL FEATURES**

1. 360° adjustable exhaust.
  2. Depth adjust device front protection plate.
  3. Drop test-proven aluminum magazine.
  4. Magnesium ergonomic frame over-molded handle grip.
  5. Magnesium casted one-piece bracket with industry leading durability.
  6. Rear-jam clearance investment-casted protector minimizes downtime and maximizes tool durability.
- High speed operation, 15 cycles/second.
  - Full automatic version available : **SN402PA**
  - Available with double or triple length magazines :  
**SN402PLM / SN402PMAG**
  - Two trigger options available :  
**SN402P-ST (sequential) / SN402P-CT (contact)**



**FASTENER SPECS**

Type	16 GA. Senco P / Prebena WS
Loading Capacity	160
A	25~50mm (1"~2")
B	26.4mm (1-1/16")
C	1.6 x 1.4mm (0.062" x 0.055")

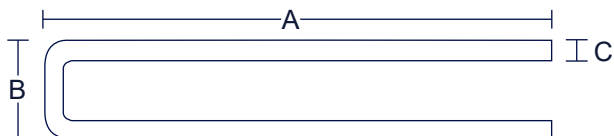

**TOOL SPECS**

Weight	2.3 kgs (5.1 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	397 In-lbs @100 psi
Applications	Wire Lathing, Furniture Framing, Foam Insulation

