


TOOL FEATURES

1. 360° adjustable exhaust.
 2. Depth adjust device front protection plate.
 3. Drop test-proven aluminum magazine.
 4. Magnesium ergonomic frame over-molded handle grip.
 5. Magnesium casted one-piece bracket with industry leading durability.
 6. Rear-jam clearance investment-casted protector minimizes downtime and maximizes tool durability.
- High speed operation, 15 cycles/second.
 - Full automatic version available : **SN402S2A**
 - Available with double or triple length magazines :
SN402S2LM / SN402S2MAG
 - Two trigger options available :
SN402S2-ST (sequential) / SN402S2-CT (contact)



FASTENER SPECS

Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	160
A	25~50mm (1"~2")
B	25.4mm (1")
C	1.6 x 1.4mm (0.062" x 0.055")

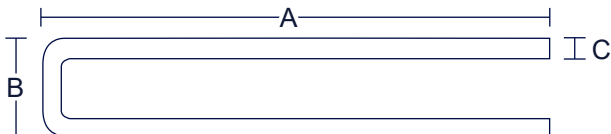

TOOL SPECS

Weight	2.3 kgs (5.1 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	385 In-lbs @100 psi
Applications	Wire Lathing, Furniture Framing, Foam Insulation

