


## TOOL FEATURES

1. Steel, adjustable hammer exhaust.
  2. Rubber protection pad protects work surface.
  3. Depth adjust device with front protection plate.
  4. Magnesium ergonomic frame over-molded handle grip.
  5. Magnesium casted one-piece bracket with industry leading durability.
  6. Rear-jam clearance investment-casted protector minimizes downtime and maximizes tool durability.
- High speed operation, 15 cycles/second.
  - Full automatic version available : **SN40GSW-14-RA**
  - Two trigger options available :  
**SN40GSW-14-ST (sequential) / SN40GSW-14-CT (contact)**



## FASTENER SPECS

Type	14 GA. Paslode GSW14
Loading Capacity	120
A	19~40mm (3/4"~1-9/16")
B	24.7mm (1")
C	2.1 x 1.8mm (0.083" x 0.071")

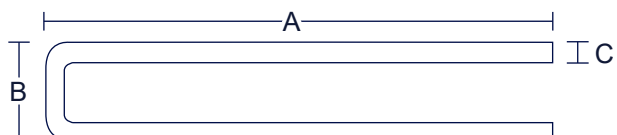

## TOOL SPECS

Weight	2.5 kgs (5.5 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	369 In-lbs @100 psi
Applications	Furniture Frames, General Construction

