


TOOL FEATURES

1. Steel, adjustable hammer exhaust.
2. Rubber protection pad protects work surface.
3. Depth adjust device with front protection plate.
4. Magnesium ergonomic frame over-molded handle grip.
5. Magnesium casted one-piece bracket with industry leading durability.
6. Rear-jam clearance investment-casted protector minimizes downtime and maximizes tool durability.
7. Durable roofing nose with carbide inserts for long-life performance.
8. Built-in "shingle guide".
 - High speed operation, 15 cycles/second.
 - Full automatic version available : **SN40GSW-R-RA**
 - Two trigger options available :
SN40GSW-R-ST (sequential) / SN40GSW-R-CT (contact)



FASTENER SPECS

Type	16 GA. Paslode GSW / Prebena WT
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	23.8mm (15/16")
C	1.6 x 1.4mm (0.062" x 0.055")

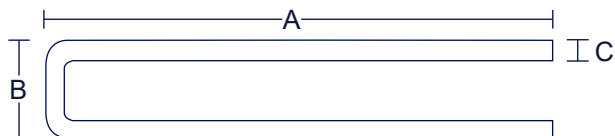

TOOL SPECS

Weight	2.5 kgs (5.5 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	369 In-lbs @100 psi
Applications	Shingle Roofing, House wrap/ vapor barrier, Sheathing

