


TOOL FEATURES

1. Steel hammer exhaust.
 2. Rubber protection pad protects work surface.
 3. Hidden depth adjust knob with investment -casted cover.
 4. Aluminum ergonomic frame over-molded handle grip.
 5. Enlarged rear reservoir minimizes staple stair stepping.
 6. Tool-free rear jam clearance rear exhaust minimizes downtime and maximizes tool durability & operation comfort.
 7. Durable roofing nose with carbide inserts for long-life performance.
 8. Built-in "shingle guide".
 - All metal housing and structure .
 - High speed operation, 15~20 cycles/second.
 - One-piece aluminum cylinder design.
 - Compact engine boosts maneuverability.
 - Pneumatic power adjustment knob.
- Full automatic version available : **SN41S2-RA**
- Two trigger options available :
SN41S2-R-ST (sequential) / SN41S2-R-CT (contact)



FASTENER SPECS

Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	160
A	19~38mm (3/4"~1-1/2")
B	25.4mm (1")
C	1.6 x 1.4mm (0.062" x 0.055")

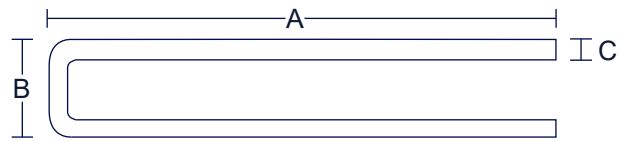

TOOL SPECS

Weight	2.4 kgs (5.3 lbs)
Height	225mm (8.8")
Width	67mm (2.6")
Length	354mm (13.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	176~237 In-lbs @100 psi
Applications	Shingle Roofing, House wrap/ vapor barrier, Sheeting

