


## TOOL FEATURES

1. Steel hammer exhaust.
  2. Rubber protection pad protects work surface.
  3. Hidden depth adjust knob with investment -casted cover.
  4. Aluminum ergonomic frame over-molded handle grip.
  5. Enlarged rear reservoir minimizes staple stair stepping.
  6. Tool-free rear jam clearance rear exhaust minimizes downtime and maximizes tool durability & operation comfort.
- All metal housing and structure .
  - High speed operation, 15~20 cycles/second.
  - One-piece aluminum cylinder design.
  - Compact engine boosts maneuverability.
  - Pneumatic power adjustment knob.
  - Full automatic version available : **SN41S2A**
  - Two trigger options available :  
**SN41S2-ST (sequential) / SN41S2-CT (contact)**



## FASTENER SPECS

|                  |                                   |
|------------------|-----------------------------------|
| Type             | 16 GA. Bostitch BCS2 / Prebena WC |
| Loading Capacity | 160                               |
| A                | 19~38mm (3/4"~1-1/2")             |
| B                | 25.4mm (1")                       |
| C                | 1.6 x 1.4mm (0.062" x 0.055")     |

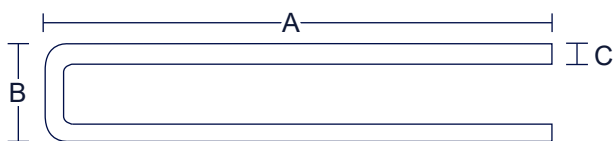

## TOOL SPECS

|                    |  |
|--------------------|--|
| Weight             | 2.3 kgs (5.0 lbs)                                    |
| Height             | 225mm (8.8")   |
| Width              | 67mm (2.6")  |
| Length             | 354mm (13.9")  |
| Operating Pressure | 5~8 bar (70~120 psi)                                 |
| Driving Power      | 176~237 In-lbs @100 psi                              |
| Applications       | Furniture Framing, Wire Lathe, Foam Insulation Board |

