


**TOOL FEATURES**

- 1. Steel hammer exhaust.
  - 2. Rubber protection pad protects work surface.
  - 3. Hidden depth adjust knob with investment -casted cover.
  - 4. Aluminum ergonomic frame over-molded handle grip.
  - 5. Enlarged rear reservoir minimizes staple stair stepping.
  - 6. Tool-free rear jam clearance rear exhaust minimizes downtime and maximizes tool durability & operation comfort.
- All metal housing and structure .
  - High speed operation, 15~20 cycles/second.
  - One-piece aluminum cylinder design.
  - Compact engine boosts maneuverability.
  - Pneumatic power adjustment knob.
  - Full automatic version available : **SN41S2A**
  - Two trigger options available :  
**SN41S2-ST (sequential) / SN41S2-CT (contact)**



**FASTENER SPECS**

Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	160
A	19~38mm (3/4"~1-1/2")
B	25.4mm (1")
C	1.6 x 1.4mm (0.062" x 0.055")

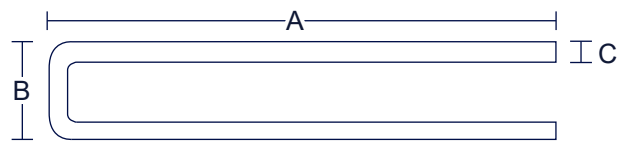

**TOOL SPECS**

Weight	2.3 kgs (5.0 lbs)
Height	225mm (8.8")
Width	67mm (2.6")
Length	354mm (13.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	176~237 In-lbs @100 psi
Applications	Furniture Framing, Wire Lathe, Foam Insulation Board

