


## TOOL FEATURES

1. Steel, adjustable hammer exhaust.
2. Rubber protection pad protects work surface.
3. Depth adjust device front protection plate.
4. Long narrow nose provides improved line of sight.
5. Magnesium ergonomic frame over-molded handle grip.
6. Magnesium casted one-piece connector with industry leading durability.
7. Rear-jam clearance investment-casted protector minimizes downtime and maximizes tool durability.
  - High speed operation, 15 cycles/second.
  - Full automatic version available : **SN50S5A**
  - Available with double or triple length magazines : **SN50S5LM / SN50S5MAG**
  - Two trigger options available : **SN50S5-ST (sequential) / SN50S5-CT (contact)**



## FASTENER SPECS

Type	16 & 17 GA. Bostitch BCS5 / Senco N / BeA 155
Loading Capacity	160~180
A	25~50mm (1"~2")
B	11.1mm (7/16")
C	1.6 x 1.4mm (0.062" x 0.055") 1.45 x 1.3mm (0.057" x 0.051")

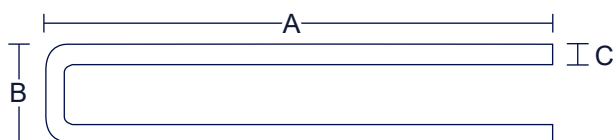

## TOOL SPECS

Weight	2.3 kgs (5.1 lbs)
Height	272mm (10.7")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power	397 In-lbs @100 psi
Applications	Furniture Frames, General Construction

