

### TOOL FEATURES

1. Rear adjustable directional exhaust.
2. Durable driver / bumper provides reliability.
3. Optional safety double trigger.
4. One-hand manual rear latch.
5. Robust metal magazine.
  - Rapid Cycling engine.



### AUTO series


Auto fire, short magazine

### ALM series

Auto fire, long magazine

### FASTENER SPECS

Loading Capacity	200~375
A	5~16mm (3/16"~5/8")
Except US1013FA(LM)&US1013JA(LM):5~13mm(3/16"~1/2")	

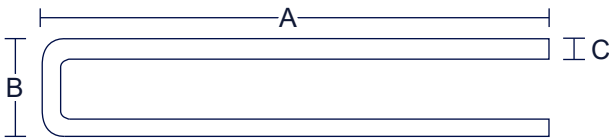

### TOOL SPECS

Weight	Short Mag : 0.9 kgs (2.0 lbs) Long Mag : 1.2 kgs (2.6 lbs)
Height	140mm (5.5")
Width	38mm (1.5")
Length	Short Mag : 216mm (8.5") Long Mag : 380mm (15")
Operating Pressure	5~6.9 bar (70~120 psi)
Driving Power	51 In-lbs @100 psi
Applications	Furniture Upholstery, Automotive Vinyl, Trim

Model Number	B	C	Capacity	Wire Gauge
USSJK16A / USSJK16ALM	4.1mm (5/32")	0.74 x 0.60mm (0.030" x 0.024")	300	22 GA. Atro SJK
US9716A / US9716ALM	4.5mm (3/16")	0.95 x 0.65mm (0.037" x 0.026")	200	21 GA. BeA 97 / Senco W
US5416A / US5416ALM	4.7mm (3/16")	1.25 x 0.50mm (0.049" x 0.020")	200	20 GA. Duo-Fast 54 / Senco E
USSNCW16A / USSNCW16ALM	4.8mm (3/16")	0.90 x 0.69mm (0.035" x 0.027")	200	21 GA. Senco W
USSNCA16A / USSNCA16ALM	4.85mm (3/16")	0.74 x 0.60mm (0.030" x 0.024")	300	22 GA. Senco A / Prebena U
US416JA / US416JALM	5.25mm (7/32")	1.16 x 0.56mm (0.045" x 0.022")	200	20 GA. Duo-Fast 63
US9916A / US9916ALM	5.4mm (7/32")	0.98 x 0.59mm (0.040" x 0.021")	200	21 GA. Atro 99 / Prebena ED
US7116A / US7116ALM	9.1mm (3/8")	0.75 x 0.60mm (0.030" x 0.024")	180	22 GA. 71 Series / Senco C
USSNCG16A / USSNCG16ALM	9.5mm (3/8")	1.30 x 0.60mm (0.051" x 0.024")	200	20 GA. Senco G
USA1116A / USA1116ALM	10.8mm (7/16")	1.22 x 0.50mm (0.048" x 0.020")	200	20 GA. Fasco A11 / Arrow T50
US1013FA / US1013FALM	11.2mm (7/16")	0.70 x 0.50mm (0.028" x 0.020")	300	23 GA. MAX 10F (1000F)
US1013JA / US1013JALM	11.2mm (7/16")	1.20 x 0.60mm (0.047" x 0.024")	200	20 GA. MAX 10J (1000J)
US8416A / US8416ALM	12.3mm (1/2")	1.00 x 0.55mm (0.039" x 0.022")	200	21 GA. Bostitch SBNK / Fasco 84
US6416A / US6416ALM	12.45mm (1/2")	0.73 x 0.51mm (0.030" x 0.024")	300	22 GA. Atro 6 / BeA 64
US50(95)16A / US50(95)16ALM	12.55mm (1/2")	1.25mm x 0.50 (0.050" x 0.020")	200	20 GA. Duo-Fast 50 / BeA 95
US8016A / US8016ALM	12.8mm (1/2")	0.90mm x 0.63 (0.036" x 0.025")	270	21 GA. 80 Series / Senco AT
USSNCF16A / USSNCF16ALM	12.8mm (1/2")	1.25mm x 0.50 (0.049" x 0.020")	200	20 GA. Senco F / Prebena P

