


TOOL FEATURES

1. 2 closure ring sizes available
2. Robust gravity casted engine pneumatic piston return design
3. Ergonomic rubber handle grip
4. Hardened clinch teeth
 - For clinch consistency & tool longevity
5. All metal construction
 - Endures rough production work environments
6. Pneumatic piston return
 - Minimizes cycle time
7. Adjustable for left or right handed operation

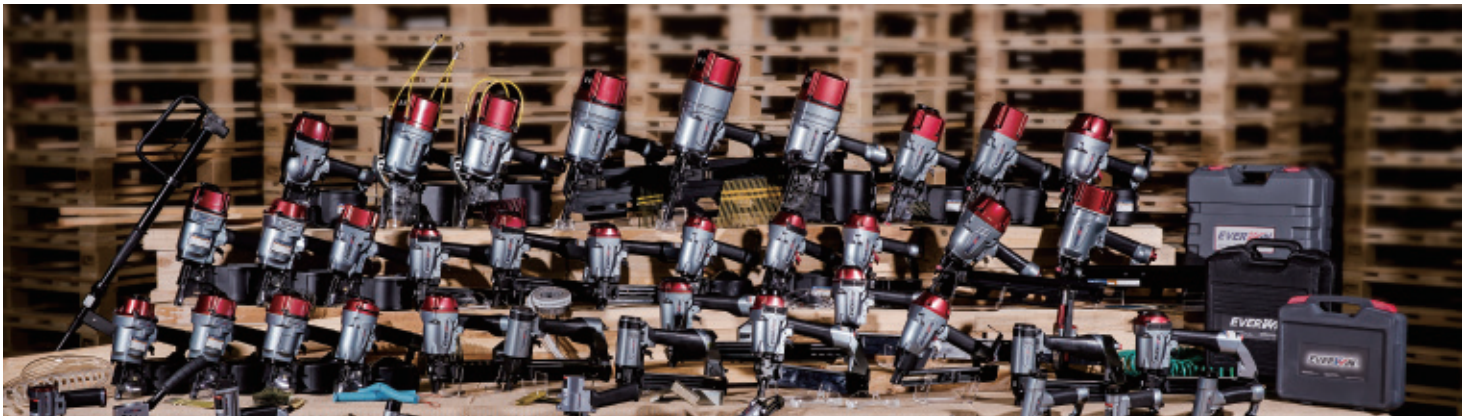

FASTENER SPECS

Type	16 GA. Meihotech 47ALD Bostitch RING516G100
Wire Diameter	16mm (0.063")
Crown Width	16.8mm (21/32")
Ring Height	9mm (3/8")
Open Ring Size	12.5mm (1/2")
Closure Ring Size	3.2~5.6mm (1/8"~7/32")
Tip Finish	Sharp or Blunt
Load Capacity	100 Ring

TOOL SPECS

Weight	1.29 kgs (2.9 lbs)
Height	189mm (7.4")
Width	89mm (3.5")
Length	335mm (13.2")
Operating Pressure	5.9~7.9 bar (85~115 psi)
Applications	Bag Closure, Bedding, Automotive Seating, Wire Cages, Fencing

