




PRECISION NAILING TECHNOLOGY

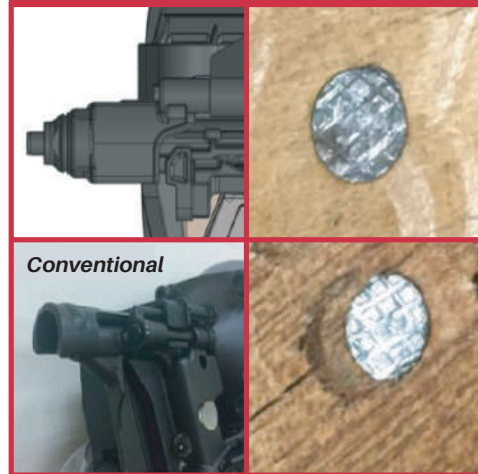

TOOL FEATURES

- 1 **ADJUSTABLE EXHAUST ENSURES WORKPLACE COMFORT**
- 2 **TOOL FREE DEPTH ADJUST**
- 3 **PRECISION NAILING TECHNOLOGY MINIMIZES DRIVER MARK OCCURRENCES AND MAXIMIZES LINE OF SIGHT IN OPERATION**
- 4 **MAGNESIUM ERGONOMIC FRAME PROVIDES MOBILITY AND BALANCE DURING OPERATION**
- 5 **ENGINEERED COMPOSITE MATERIAL ROTATABLE HOOK**
- 6 **ROBUST NYLON MAGAZINE WITH INDUSTRY LEADING DURABILITY**
 - **FCN90LB-CT AVAILABLE AS AN OPTIONAL "CONTACT FIRE ONLY" TOOL**
 - **INDUSTRY LEADING POWER WEIGHT RATIO**

TOOL SPECIFICATIONS

Weight	6.6lbs. (3.0kg)
H x W x L	14.3" x 5.1" x 12.2" 364mm x 130mm x 311mm
Operating Pressure	70 to 120 PSI (5-8 bars)
Driving Power	850 in-lbs.
Firing Mode	Sequential Fire

FASTENER SPECIFICATIONS

Collation	15° Wire/Plastic Collated
Fastener Length	Wire: 1 3/4" ~ 3 1/2" (45~90mm) Plastic: 1 3/4" ~ 3" (45~75mm)
Head Diameter	0.256" ~ 0.303" (6.5~7.7mm)
Shank Diameter	Wire: .099" ~ .148" (2.5~3.6mm) Plastic: .099" ~ .114" (2.5~2.9mm)
Shank Type	Smooth, Screw, Ring
Load Capacity	150~300

APPLICATIONS: Framing, Sheathing, Decking, Subfloors, General Construction

