


MORE POWERFUL THAN EVER

- 20% EXTRA POWER
- AVAILABLE WITH SEQUENTIAL TRIGGER
- FAST AND POWERFUL FOR HEAVY DUTY APPLICATIONS
- OPTIONAL HEAVY DUTY DEPTH ADJUSTMENT

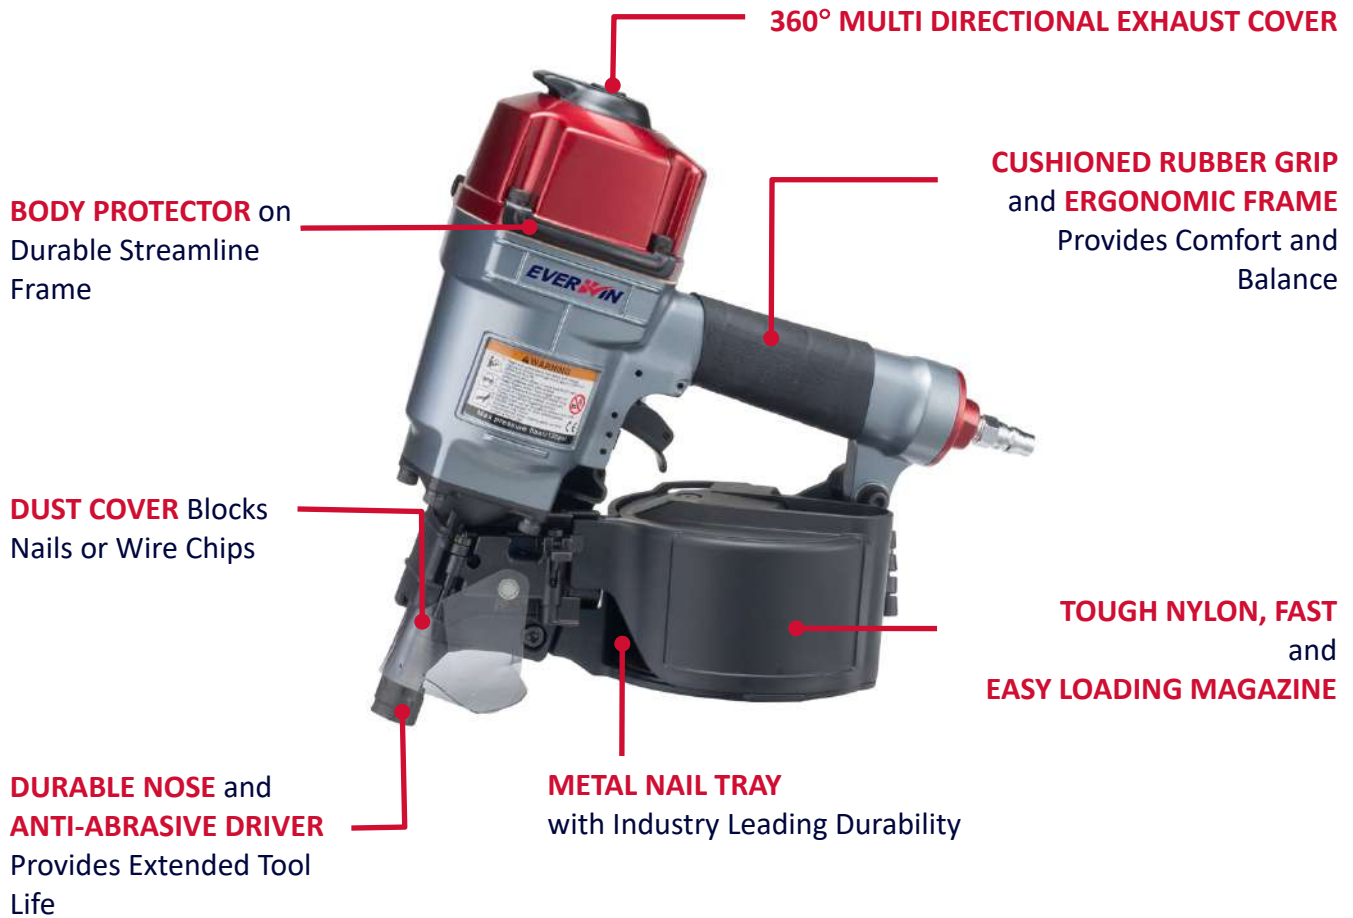

FASTENER SPECIFICATION

Collation:	15° Wire Collated
Fastener Lengths:	32~57 mm (1-1/4"~2-1/4")
Shank Dia.:	Φ 2.5~2.9mm (.099"~.113")
Head Dia.:	Φ 5.7~7.2mm (.224"~.283")
Shank Type:	Smooth, Screw, Ring
Load Capacity:	225-300

TOOL SPECIFICATION

Weight:	5.9lbs. (2.7kg)
Height:	11.6" (294mm)
Width:	5.2" (132mm)
Length:	10.6" (268mm)
Operating pressure:	70 to 120 PSI (5-8 bars)
Firing mode:	Contact Fire
Applications:	Wooden Pallet, Drum and Box Construction, Crating

