


AUTOMATION WITH MINIMAL MAINTENANCE

- HIGH SPEED OPERATION, 10 SHOTS/SECOND
- GEARED WITH REMOTE-CONTROL TRIGGER VALVE
- GEARED WITH HIGH FLOW DRIVER GUIDE
- FITTED WITH 3/8" NPT FOR 3/8 AIR PLUG

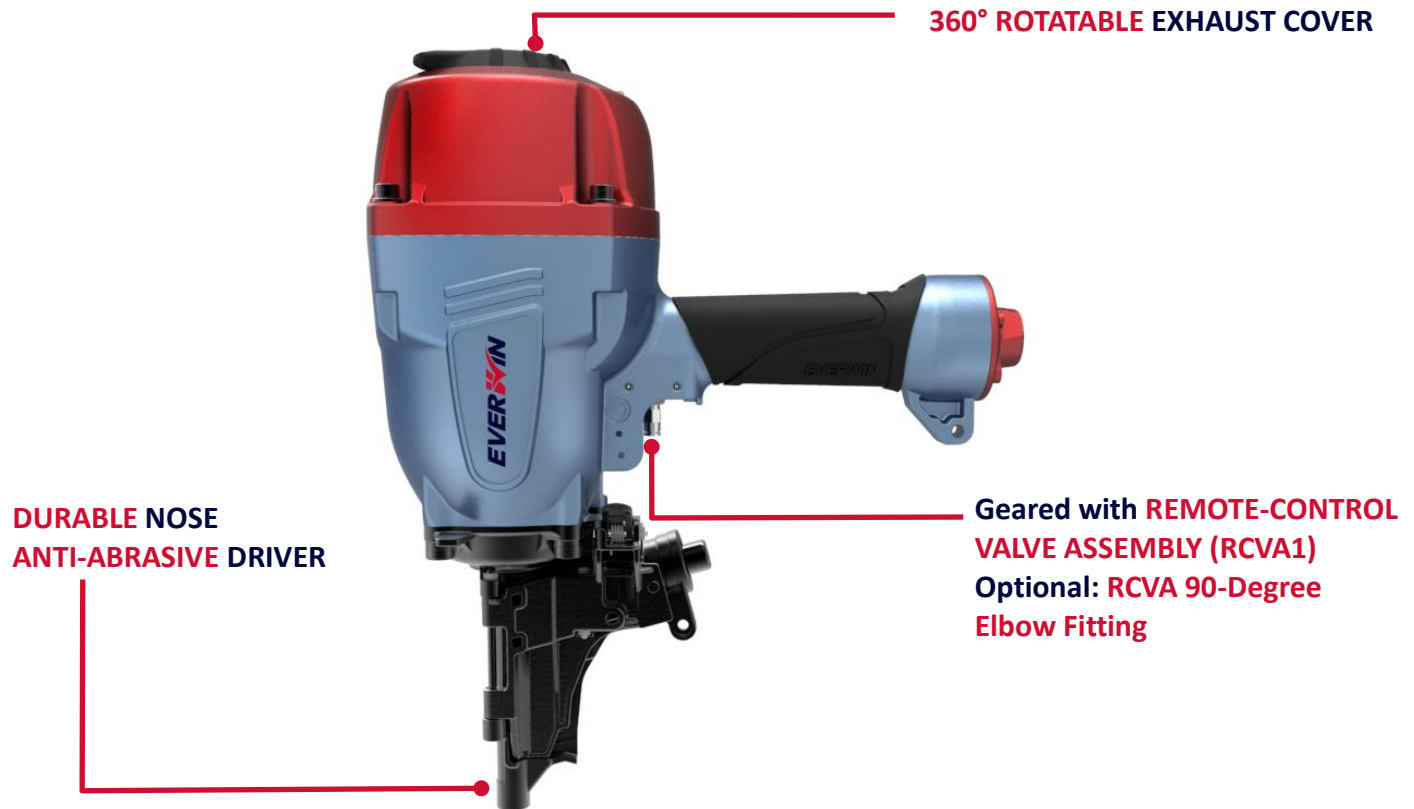

**DURABLE NOSE
ANTI-ABRASIVE DRIVER**

360° ROTATABLE EXHAUST COVER

**Geared with REMOTE-CONTROL
VALVE ASSEMBLY (RCVA1)
Optional: RCVA 90-Degree
Elbow Fitting**

FASTENER SPECIFICATION

Collation:	15° Wire Collated
Fastener Lengths:	2"~3-1/2" (50~90mm)
Shank Diameter:	0.099"~0.148" (2.5~3.8mm)
Head Diameter:	0.256"~0.303" (6.5~7.7mm)
Shank Type:	Smooth, Screw, Ring
Load Capacity:	User Dependent

TOOL SPECIFICATION

Weight:	6.5lbs. (2.97kg)
Height:	13.8" (350mm)
Width:	4.7" (120mm)
Length:	11.9" (302mm)
Operating pressure:	70 to 120 PSI (5-8 bars)
Driving power	1050 in-lbs
Firing mode:	Remote Control Actuated
Applications:	Machined-Mounting Wooden Pallet/Panel/Crate

