

WORK FASTER WITH MORE PRECISION

● 500 IN-LBS OF DRIVING FORCE

● PATENTED PRECISION NAILING TECHNOLOGY

ADJUSTABLE EXHAUST

Ensures Workplace Comfort

AUTO-ADJUST SMART TRIGGER

with

TRIGGER SAFETY LOCK

Automatically Switches between Continuous and Sequential Firing Mode

TOOL-FREE DEPTH ADJUST

NO-MAR PAD INCLUDED



**CUSHIONED RUBBER GRIP
ERGONOMIC FRAME**

Provides Comfort and Balance

METAL BELT HOOK

for Workplace Convenience


ROBUST NYLON MAGAZINE

Industry Leading Durability

PRECISION NAILING TECHNOLOGY

Minimizes Driver Mark Occurrences and Maximizes Line of Sight in Operation

PRECISION NAILING TECHNOLOGY

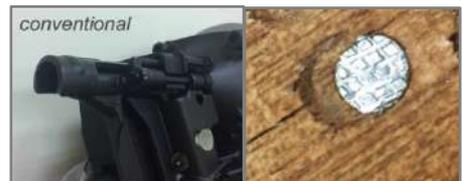

FASTENER SPECIFICATION

Collation:	15° Wire/Plastic Collated
Fastener	Wire: 38~65mm (1-1/2"~2-1/2")
Lengths:	Plastic: 32~65mm (1-1/4"~2-1/2")
Shank Dia.:	Φ2.1~2.5mm (.083"~.099")
Shank Type:	Smooth, Screw, Ring
Load Capacity:	400 (Wire Welded) 200 (Plastic Collated)

TOOL SPECIFICATION

Weight:	5.0lbs. (2.3kg)
Height:	11.7" (297mm)
Width:	5" (127mm)
Length:	10.7" (272mm)
Operating pressure:	70 to 120 PSI (5-8 bars)
Firing mode:	Smart Trigger
Applications:	Decking, Furring, Siding Wooden Fencing, Subfloors Sheathing and Framing

