

## INDUSTRIAL CARTON STAPLING SOLUTION

- **HIGH SPEED OPERATION**
- **DURABLE FOR PROFESSIONAL USE**
- **CURVED ANVILS AVAILABLE FOR VARIOUS APPLICATIONS**


**ROBUST GRAVITY CASTED FRAME** for Extended Tool Life

**POWERFUL SHUTTLE BLADE** for Pre-Compression prior to and during Operation

**SPECIAL-TREATED CLINCH PLATE** for Maximum Durability

**6" x 1" HIGH THROAT** Provides Flexibility during Usage

Standard Equipped **AIR-FLOW ADJUST PORT**

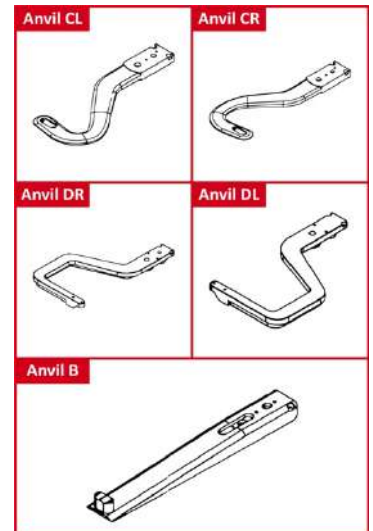

**CR / CL / DR / DL / B**  
Type Anvils Available

TOOL SPECIFICATION	
<b>Weight:</b>	4.8 lbs (2.2kg)
<b>Height:</b>	9.4" (240mm)
<b>Width:</b>	2.2" (55mm)
<b>Length:</b>	14.6" (370mm)
<b>Pressure:</b>	36 to 55 PSI (2.5-3.9 bars)
<b>Air Consumption:</b>	0.4 L/sec @85 psi
<b>Firing Mode:</b>	Trigger fire
<b>Applications:</b>	Corrugated Containers Pallet Boxes, Container Inserts
<b>Capacity</b>	110~250

MODEL NUMBER	STAPLE TYPE	CROWN WIDTH	WIRE THICKNESS	WIRE WIDTH	STAPLE LENGTH
<b>PS50-10B</b>	SB 103020	1/2" (12.95mm)	0.020" (0.50mm)	0.103" (2.60mm)	3/8~5/8" (10~15mm)
<b>PS50-5B</b>	SB 5019	1/2" (12.85mm)	0.022" (0.55mm)	0.050" (1.27mm)	1/4~5/8" (6~15mm)
<b>PS50-777</b>	JK 777	1/2" (12.3mm)	0.026" (0.65mm)	0.090" (2.25mm)	3/8~5/8" (10~15mm)
<b>PS50-779</b>	JK 779	1/2" (12.3mm)	0.020" (0.50mm)	0.103" (2.60mm)	5/16~5/8" (8~15mm)
<b>PS50-80</b>	80 Series	1/2" (12.8mm)	0.025" (0.63mm)	0.036" (0.90mm)	1/4~5/8" (6mm~15mm)

